




**cavi zenit**

## MULTIPOLAR H03VV-F CABLES

**IMQ <HAR>**

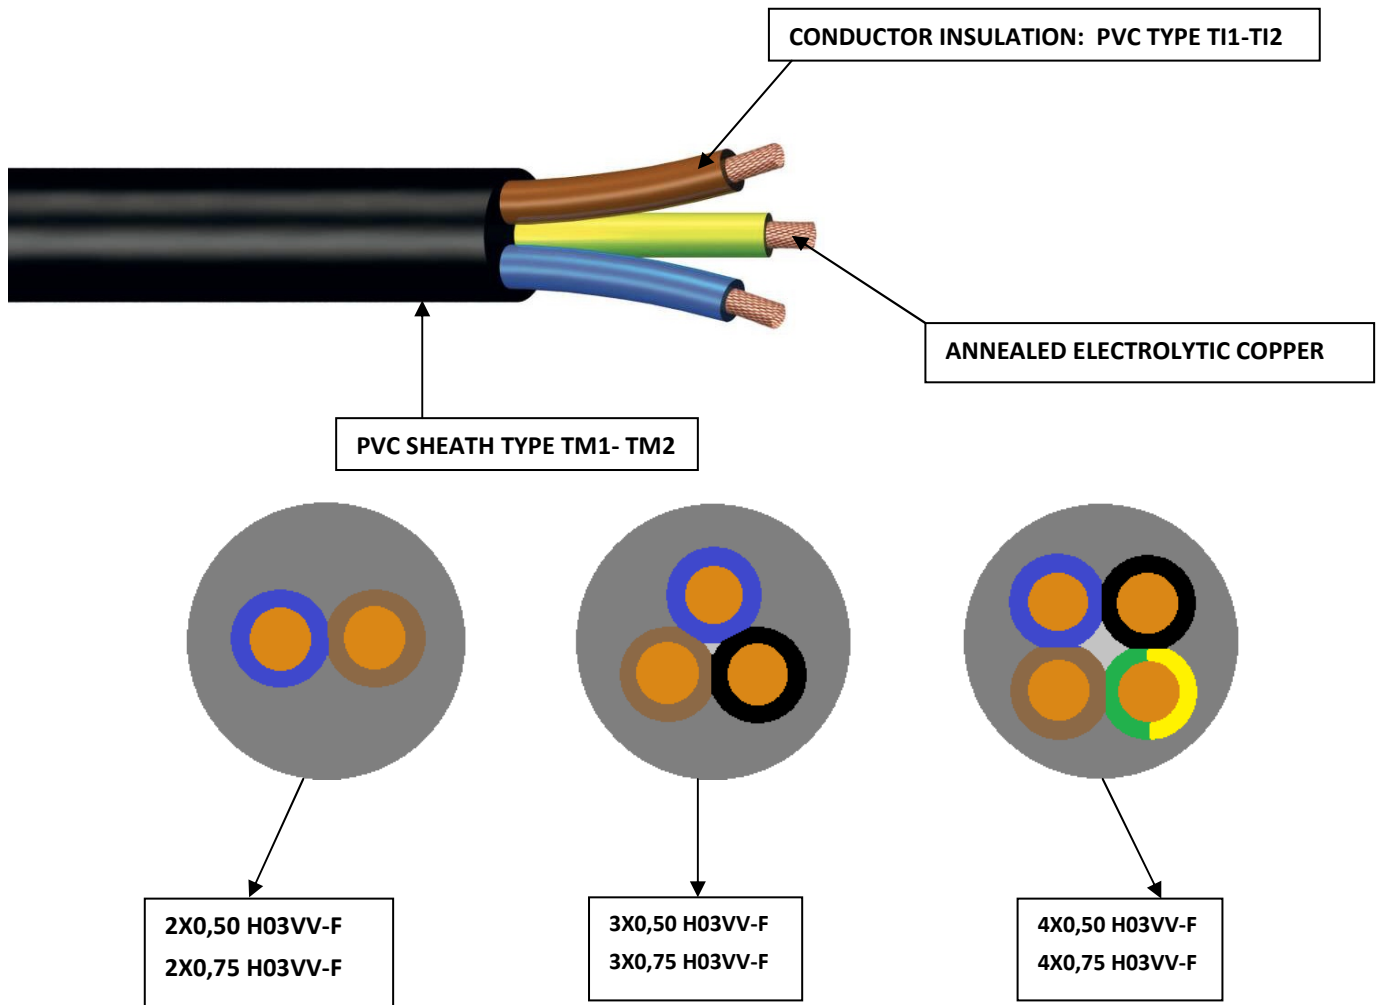

### CHARACTERISTICS OF H03VV-F CABLES

DESCRIPTION:	MULTIPOLAR CABLES H03VV-F – IMQ <HAR>
USE TEMPERATURE	-15 °C / +70 °C
REFERENCE DOCUMENTS:	CEI 50525 - EN 50363
CONDUCTOR:	ANNEALED ELECTROLYTIC COPPER CU ETP 1
COLOURS:	BY REQUEST



# cavi zenit

## MULTIPOLAR H03VV-F CABLES

CODE	n° x sqr mm CONDUCTOR No. FOR NOMINAL SECTIONAL AREA	Mm (±0,20) MEAN OVERALL DIMENSIONS	PVC CONDUCTOR INSULATION	SHEATH PVC	Ohm/km MAX. RESISTAN CE AT 20°C	MAX VOLT.
22050T0000C510S1	2x0,50	5,1 ±0,2 mm	PVC TYPE TI1-TI2	PVC TYPE TM1-TM2	39,0 Ohm/km	300/300 V
22075T0000C540S1	2x0,75	5,4 ±0,2 mm	PVC TYPE TI1	PVC TYPE TM1-TM2	26,0 Ohm/km	300/300 V
33050T0000C550S1	3x0,50	5,4 ±0,2 mm	PVC TYPE TI1	PVC TYPE TM1-TM2	39,0 Ohm/km	300/300 V
33075T0000C590S1	3x0,75	6,0 ±0,2 mm	PVC TYPE TI1	PVC TYPE TM1-TM2	26,0 Ohm/km	300/300 V
44050T0000C610S1	4x0,50	6,0 ±0,2 mm	PVC TYPE TI1	PVC TYPE TM1-TM2	39,0 Ohm/km	300/300 V
44075T0000C640S1	4x0,75	6,4 ±0,2 mm	PVC TYPE TI1	PVC TYPE TM1-TM2	26,0 Ohm/km	300/300 V

ALL CABLES ARE TESTED ACCORDING TO THE REQUIREMENTS OF THE REFERENCE STANDARD