




cavi zenit

MULTIPOLAR H03VVH2-F CABLES

IMQ <HAR>

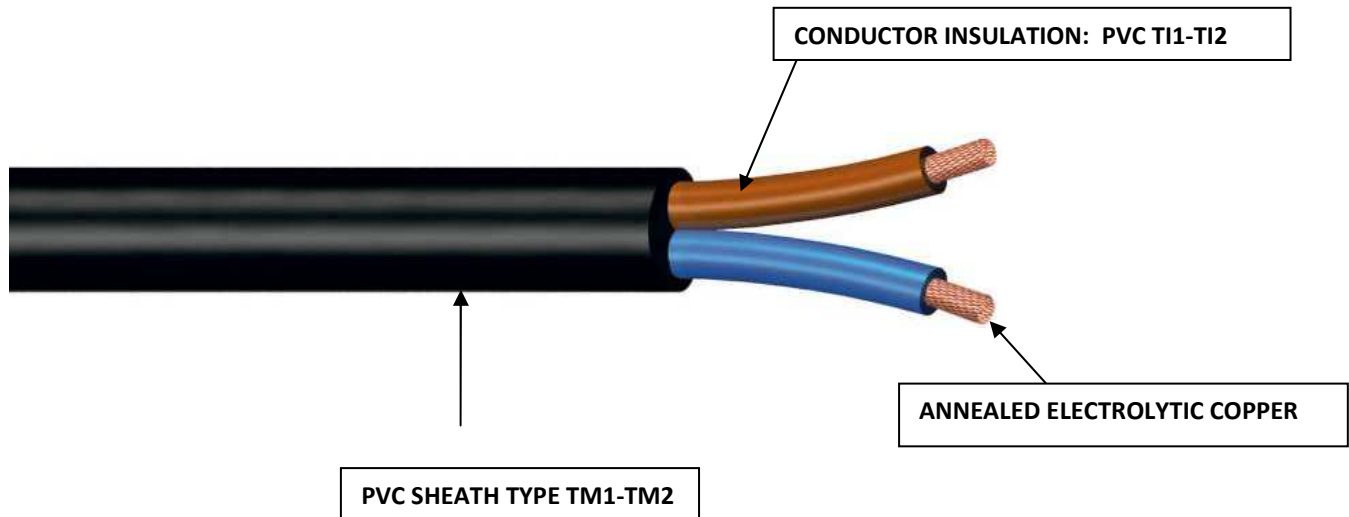

CHARACTERISTICS OF H03VVH2-F CABLES

DESCRIPTION:	MULTIPOLAR CABLES H03VVH2-F – IMQ <HAR>
USE TEMPERATURE	-15 °C / +70 °C
REFERENCE DOCUMENTS:	CEI 50525-EN 50363
CONDUCTOR:	ANNEALED ELECTROLYTIC COPPER CU ETP 1
COLOURS:	BY REQUEST



cavi zenit

MULTIPOLAR H03VVH2-F CABLES

CODE	n° x sqr mm CONDUCTOR No. FOR NOMINAL SECTIONAL AREA	Mm (±0,20) MEAN OVERALL DIMENSIONS	PVC CONDUCTOR INSULATION	SHEATH PVC	Ohm/km MAX. RESISTANCE AT 20°C	MAX VOLT.
22050T0000C520S1	2x0,50	3,2 X 5,2 ±0,2 mm	PVC TI1-TI2	PVC TM1- TM2	39,0 Ohm/km	300/300 V
22075T0000C560S1	2x0,75	3,5 X 5,6 ±0,2 mm	PVC TI1-TI2	PVC TM1- TM2	26,0 Ohm/km	300/300 V

ALL CABLES ARE TESTED ACCORDING TO THE REQUIREMENTS OF THE REFERENCE STANDARD