


AUTOMOTIVE UNIPOLAR FLYW CABLE

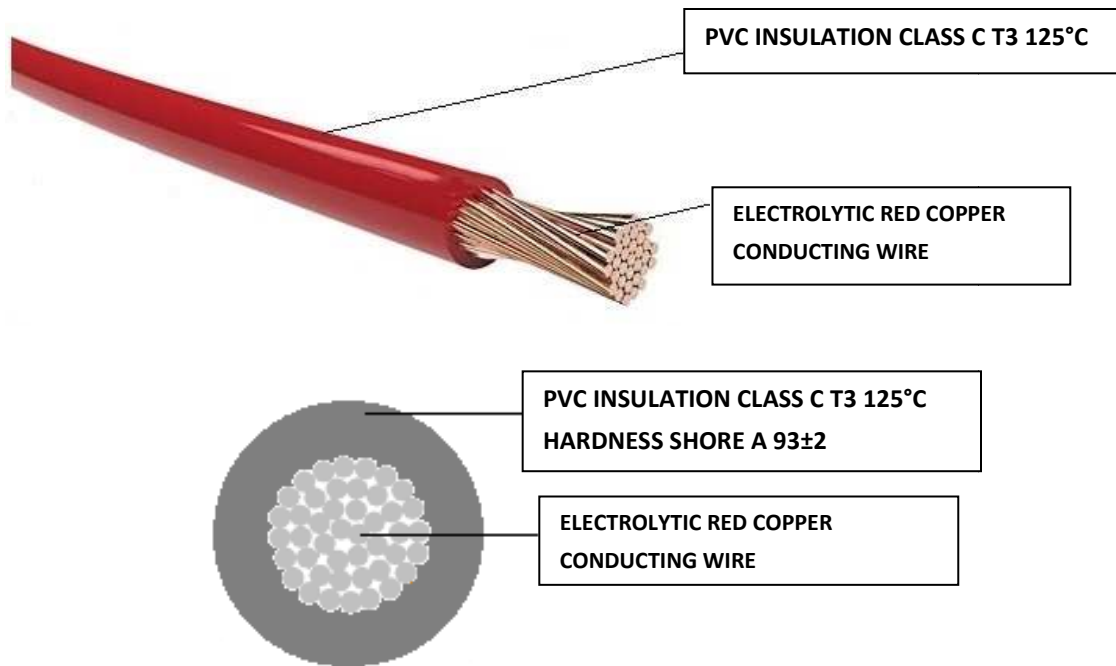

CHARACTERISTICS OF FLYW CABLES TYPE A e TYPE B

DESCRIPTION:	UNIPOLAR CABLE FLYW RED ELECTROLITIC COPPER CU ETP1
USE TEMPERATURE:	-40°C / + 125°C (IDLE STATE)
REFERENCE DOCUMENTS:	ISO 19642 : 2019 / DIN 72551 / ISO 6722 CLASS C / LV 112 / ISO 3795 / FIAT 91107 / 15 (where applicable)
COLOURS :	BY REQUEST
MINIMUM BENDING RADIUS	≥6 X D

UNIPOLAR AUTOMOTIVE FLYW CABLES : TYPE A

CODE	CROSS SECTION	COND. CONSTR.	EXT. DIAMETR.	INSUL. MATERIAL	EL. RES. MAX 20°	MAX VOLT.	INSULATI ON THICKNE SS (+)
11035T0000C130S2	1x0,35	7x0,250±0,01 mm	1,30 +0mm -0,1mm	PVC T3 HT 125°C	52,0 Ohm/km	<300 V	≥0,20
11050T0000C160S2	1x0,50	19x0,180±0,01 mm	1,60 +0mm -0,2mm	PVC T3 HT 125°C	37,1 Ohm/km	<300 V	≥0,22
11075T0000C190S2	1x0,75	19x0,220±0,01 mm	1,90 + 0 mm -0,2 mm	PVC T3 HT 125°C	24,7 Ohm/km	<300 V	≥0,24
11100T0000C210S2	1x1,00	19x0,254±0,01 mm	2,10 +0 mm -0,2mm	PVC T3 HT 125°C	18,5 Ohm/km	<300 V	≥0,24
11150T0000C240S2	1x1,50	19x0,310±0,01 mm	2,40 +0 mm -0,2 mm	PVC T3 HT 125°C	12,7 Ohm/km	<300 V	≥0,24

UNIPOLAR AUTOMOTIVE FLYW CABLES: TYPE B

CODE	CROSS SECTION	COND. CONSTR.	EXT. DIAMETR.	INSUL. MATERIAL	EL. RES. MAX 20°	MAX VOLT.	INSULATI ON THICKNE SS (+)
11035T0000E140S1	1x0,35	12x0,20±0,01 mm	1,40 +0mm -0,1mm	PVC T3 HT 125°C	52,0 Ohm/km	<300 V	≥0,20
11050T0000E160S1	1x0,50	16x0,20±0,01 mm	1,60 +0mm -0,2mm	PVC T3 HT 125°C	37,1 Ohm/km	<300 V	≥0,22
11075T0000E190S1	1x0,75	24x0,20±0,01 mm	1,90 + 0 mm -0,2 mm	PVC T3 HT 125°C	24,7 Ohm/km	<300 V	≥0,24
11100T0000E210S1	1x1,00	32x0,20±0,01 mm	2,10 +0 mm -0,2mm	PVC T3 HT 125°C	18,5 Ohm/km	<300 V	≥0,24
11150T0000E240S1	1x1,50	30x0,25±0,01 mm	2,40 +0 mm -0,2 mm	PVC T3 HT 125°C	12,7 Ohm/km	<300 V	≥0,24
11200T0000E280S1	1x2,00	28x0,30±0,01 mm	2,80 +0 mm -0,3 mm	PVC T3 HT 125°C	9,42 Ohm/km	<300 V	≥0,28
11250T0000E300S1	1x2,50	50x0,25±0,01 mm	3,00 +0 mm -0,3 mm	PVC T3 HT 125°C	7,6 Ohm/km	<300 V	≥0,28
11400T0000E370S1	1x4,00	56x0,30±0,01 mm	3,70 +0 mm -0,3 mm	PVC T3 HT 125°C	4,7 Ohm/km	<300 V	≥0,32
11600T0000E430S1	1x6,00	84x0,30±0,01 mm	4,30 +0 mm -0,3 mm	PVC T3 HT 125°C	3,1 Ohm/km	<300 V	≥0,32
11800T0000E520S1	1x8,00	112x0,30±0,01 mm	5,20±0,20 mm	PVC T3 HT 125°C	2,26 Ohm/km	<300 V	≥0,32



cavi zenit

11110T0000E650S1	1x10,00	80x0,40±0,01 mm	6,50±0,10 mm	PVC T3 HT 125°C	1,82 Ohm/km	<300 V	≥0,48
11160T0000E770S1	1x16,00	126x0,40±0,01 mm	7,70±0,15 mm	PVC T3 HT 125°C	1,16 Ohm/km	<300 V	≥0,52

ALL CABLES ARE TESTED ACCORDING TO THE REQUIREMENTS OF THE REFERENCE STANDARD