



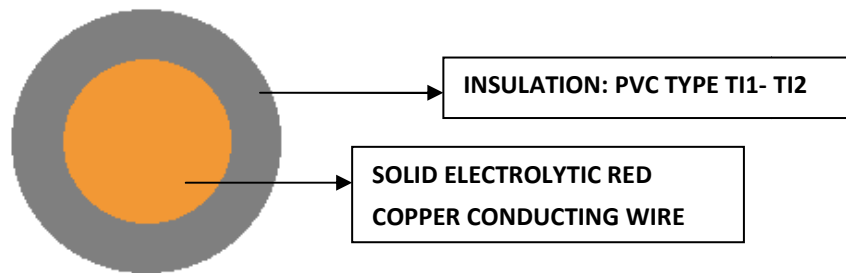

cavi zenit

UNIPOLAR H05V-U / H07V-U CABLE

IMQ <HAR>

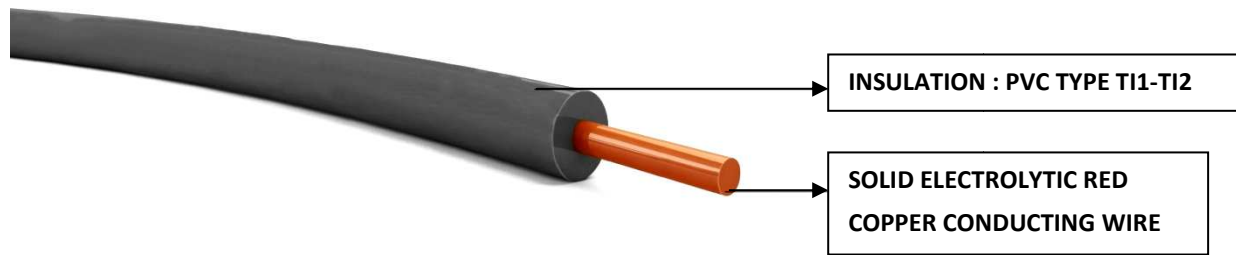

CHARACTERISTICS OF H05V-U / H07V-U CABLES

DESCRIPTION:	UNIPOLAR CABLE H05V-U / H07V-U SOLID ELECTROLITIC RED COPPER CU ETP1
USE TEMPERATURE:	-15 °C / +70 °C (IDLE STATE)
REFERENCE DOCUMENTS:	CEI EN 50525-1 / IEC 60228 CLASSE 1/ CEI EN 50363
COLOURS :	BY REQUEST



cavi zenit

UNIPOLAR H05V-U / H07V-U CABLES

CODE	CROSS SECTION	COND. CONSTR.	EXT. DIAMETR.	INSUL. MATERIAL	EL. RES. MAX 20°	MAX VOLT.
11050T0000B210S5	1x0,50	1 X 0,78 ±0,02	2,10±0,10 mm	PVC TIPO TI1- TI2	36,0 Ohm/km	300/500 V
11075T0000B230S5	1x0,75	1 X 0,98 ±0,02	2,30±0,10 mm	PVC TIPO TI1- TI2	24,5 Ohm/km	300/500 V
11100T0000B250S5	1x1,00	1 X 1,13 ±0,02	2,50 ±0,10 mm	PVC TIPO TI1- TI2	18,1 Ohm/km	300/500 V
11150T0000B290S5	1x1,50	1 X 1,37 ±0,02	2,90 ±0,10 mm	PVC TIPO TI1- TI2	12,1 Ohm/km	450/700 V

ALL CABLES ARE TESTED ACCORDING TO THE REQUIREMENTS OF THE REFERENCE STANDARD