



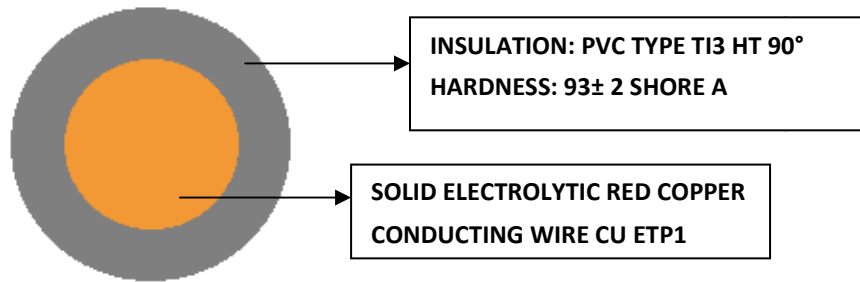

**cavi zenit**

## UNIPOLAR H05V2-U / H07V2-U CABLE

**IMQ <HAR>**

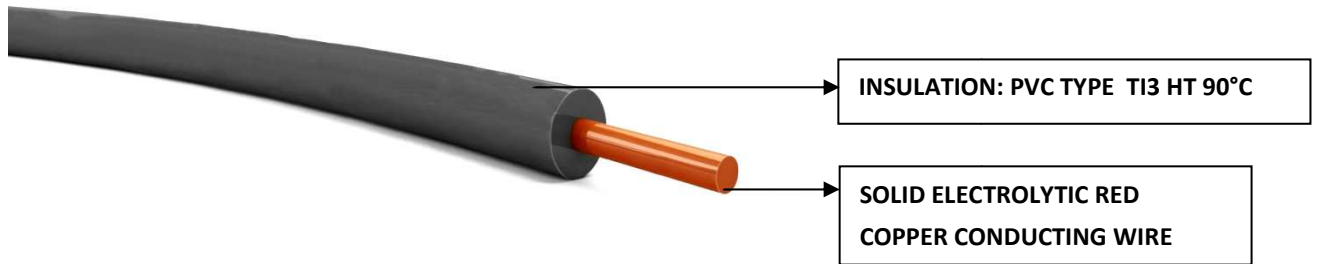

### CHARACTERISTICS OF H05V2-U / H07V2-U CABLES

DESCRIPTION:	UNIPOLAR CABLE H05V2-U / H07V2-U SOLID ELECTROLYTIC RED COPPER CU ETP1
USE TEMPERATURE:	-15 °C / +90 °C (IDLE STATE)
REFERENCE DOCUMENTS:	CEI EN 50525-1 / IEC 60228 CLASS 1
COLOURS :	BY REQUEST



**cavi zenit**

**UNIPOLAR H05V2-U / H07V2-U CABLES**

CODE	CROSS SECTION	COND. CONSTR.	EXT. DIAMETR.	INSUL. MATERIAL	EL. RES. MAX 20°	MAX VOLT.
11050T0000B210S5	1x0,50	1 X 0,78 ±0,02	2,10±0,10 mm	TI3 HT 90°C	36,0 Ohm/km	300/500 V
11075T0000B230S5	1x0,75	1 X 0,98 ±0,02	2,30±0,10 mm	TI3 HT 90°C	24,5 Ohm/km	300/500 V
11100T0000B250S5	1x1,00	1 X 1,13 ±0,02	2,50 ±0,10 mm	TI3 HT 90°C	18,1 Ohm/km	300/500 V
11150T0000B290S5	1x1,50	1 X 1,37 ±0,02	2,90 ±0,10 mm	TI3 HT 90°C	12,1 Ohm/km	450/750 V

**ALL CABLES ARE TESTED ACCORDING TO THE REQUIREMENTS OF THE REFERENCE STANDARD**