






**cavi zenit**

## MULTIPOLAR H05VV-F CABLES


**IMQ <HAR>**

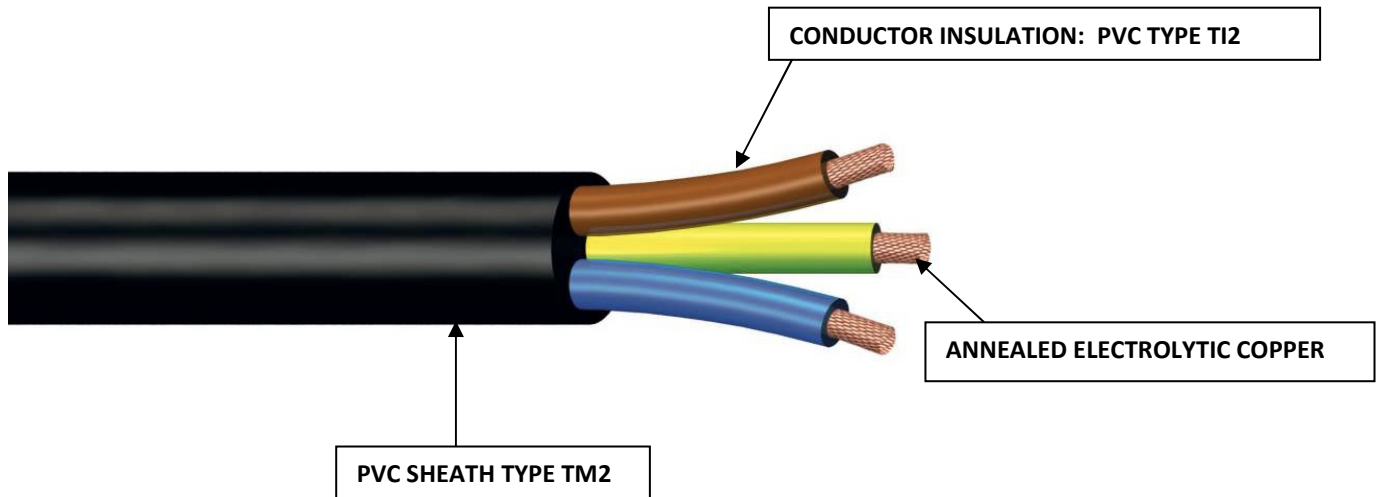


2X0,75 H05VV-F  
 2X1,00 H05VV-F  
 2x1,50 H05VV-F  
 2X2,50 H05VV-F



3X0,75 H05VV-F  
 3X1,00 H05VV-F  
 3x1,50 H05VV-F  
 3X2,50 H05VV-F



4X0,75 H05VV-F  
 4X1,00 H05VV-F  
 4x1,50 H05VV-F  
 4X2,50 H05VV-F



5X0,75 H05VV-F  
 5X1,00 H05VV-F  
 5x1,50 H05VV-F  
 5X2,50 H05VV-F

### CHARACTERISTICS OF H05VV-F CABLES

DESCRIPTION:	MULTIPOLAR CABLES H05VV-F – IMQ <HAR>
USE TEMPERATURE	-15 °C / +70 °C
REFERENCE DOCUMENTS:	CEI 50525 – EN 50363
CONDUCTOR:	ANNEALED ELECTROLYTIC COPPER CU ETP 1
COLOURS:	BY REQUEST



## MULTIPOLAR H05VV-F CABLES

CODE	CONDUCTOR No. FOR NOMINAL SECTIONAL AREA n° x sqr mm	MEAN OVERALL DIMENSIONS	PVC CONDUCTOR INSULATION	SHEATH PVC	Ohm/km MAX. RESISTANCE AT 20°C	MAX VOLT.
22075T0000C630S1	2x0,75	6,3 ±0,2 mm	PVC TYPE TI2	PVC TYPE TM2	26,0 Ohm/km	300/500 V
22100T0000C660S1	2x1,00	6,6 ±0,2 mm	PVC TYPE TI2	PVC TYPE TM2	19,50 Ohm/km	300/500 V
22150T0000C760S1	2X1,50	7,6 ±0,2 mm	PVC TYPE TI2	PVC TYPE TM2	13,3 Ohm/km	300/500 V
22250T0000C930S1	2X2,50	9,3±0,2 mm	PVC TYPE TI2	PVC TYPE TM2	7,98 Ohm/km	300/500 V
33075T0000C670S1	3X0,75	6,6 ±0,2 mm	PVC TYPE TI2	PVC TYPE TM2	26,0 Ohm/km	300/500 V
33100T0000C700S1	3x1,00	7,0 ±0,2 mm	PVC TYPE TI2	PVC TYPE TM2	19,50 Ohm/km	300/500 V
33150T0000C830S1	3X1,50	8,3±0,2 mm	PVC TYPE TI2	PVC TYPE TM2	13,3 Ohm/km	300/500 V
33250T0000C101S1	3X2,50	10,1±0,2 mm	PVC TYPE TI2	PVC TYPE TM2	7,98 Ohm/km	300/500 V
44075T0000C640S1	4X0,75	7,2 ±0,2 mm	PVC TYPE TI2	PVC TYPE TM2	26,0 Ohm/km	300/500 V
44100T0000C790S1	4x1,00	7,90±0,20 mm	PVC TYPE TI2	PVC TYPE TM2	19,50 Ohm/km	300/500 V
44150T0000C930S1	4X1,50	9,30±0,20 mm	PVC TYPE TI2	PVC TYPE TM2	13,3 Ohm/km	300/500 V
44250T0000C1100S1	4X2,50	11,0±0,20 mm	PVC TYPE TI2	PVC TYPE TM2	7,98 Ohm/km	300/500 V
55075T0000C820S1	5X0,75	8,2±0,20 mm	PVC TYPE TI2	PVC TYPE TM2	26,0 Ohm/km	300/500 V
55100T0000C860S1	5x1,00	8,6±0,20 mm	PVC TYPE TI2	PVC TYPE TM2	19,50 Ohm/km	300/500 V
55150T0000C104S1	5X1,50	10,4±0,20 mm	PVC TYPE TI2	PVC TYPE TM2	13,3 Ohm/km	300/500 V
55250T0000C123S1	5X2,50	12,3±0,20 mm	PVC TYPE TI2	PVC TYPE TM2	7,98 Ohm/km	300/500 V

**ALL CABLES ARE TESTED ACCORDING TO THE REQUIREMENTS OF THE REFERENCE STANDARD**