


UNIPOLAR AUTOMOTIVE FLR2X-B T4 150°C CABLE

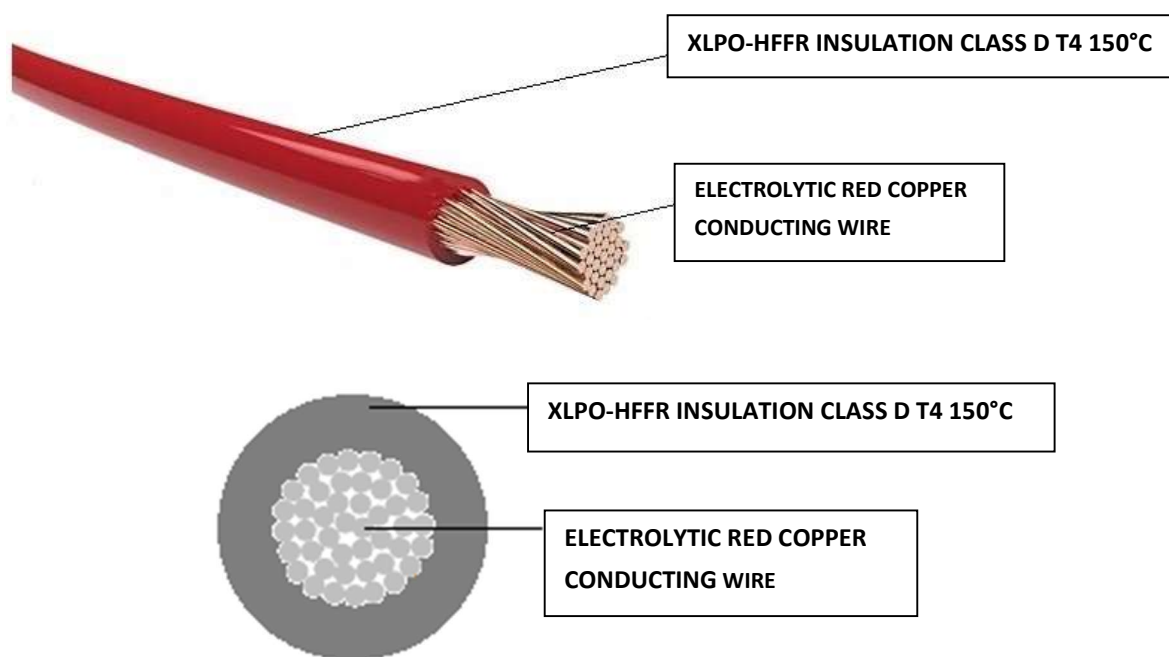

CHARACTERISTICS OF FLR2X-B T4 150°C CABLES

DESCRIPTION:	UNIPOLAR CABLE FLR2X-B T4 150° RED ELECTROLITIC COPPER CU ETP1
USE TEMPERATURE:	-50°C / + 150°C (IDLE STATE)
REFERENCE DOCUMENTS:	ISO 19642 CLASSE D FLR2X CEI EN 60228 UL 94V2 - LV112 ROHS II/III
COLOURS :	BY REQUEST

CAVI ZENIT SRL

Via Ganna 27, 21039 Bedero Valcuvia (VA), TEL. 0332/724512- FAX 0332/725145

E-mail: info@cavizenit.it - www.cavizenit.it - C.F. Iscr. Reg. Impr. Varese 02143560122

Trib. Di Varese 20379- Cap. Soc. € 105000,00 i.v. Partita IVA IT 02143560122



cavi zenit



IATF 16949:2016



EN-ISO 14001:2015

EN-ISO 9001:2015

UNIPOLAR AUTOMOTIVE FLR2X-B T4 150°C CABLES

CODE	CROSS SECTION	COND. CONSTR.	EXT. DIAMETR.	INSUL. MATERIAL	EL. RES. MAX 20°	MAX VOLT.	INSULATION THICKNESS (+)
11035T0000F130S1	1x0,35	12x0,20±0,01 mm	1,40 +0mm -0,1mm	XLPO – HFFR T4 150°C	52,0 Ohm/km	<300 V	≥0,20
11050T0000F150S1	1x0,50	16x0,20±0,01 mm	1,60 +0mm -0,2mm	XLPO – HFFR T4 150°C	37,1 Ohm/km	<300 V	≥0,22
11075T0000F180S1	1x0,75	24x0,20±0,01 mm	1,90 + 0 mm -0,2 mm	XLPO – HFFR T4 150°C	24,7 Ohm/km	<300 V	≥0,24
11100T0000F200S1	1x1,00	32x0,20±0,01 mm	2,10 +0 mm -0,2mm	XLPO – HFFR T4 150°C	18,5 Ohm/km	<300 V	≥,24
11150T0000F225S1	1x1,50	30x0,25±0,01 mm	2,40 +0 mm -0,2 mm	XLPO – HFFR T4 150°C	12,7 Ohm/km	<300 V	≥0,24
11200T0000F265S1	1x2,00	28x0,30±0,01 mm	2,80 +0 mm -0,3 mm	XLPO – HFFR T4 150°C	9,42 Ohm/km	<300 V	≥0,28
11250T0000F285S1	1x2,50	50x0,25±0,01 mm	3,00 +0 mm -0,3 mm	XLPO – HFFR T4 150°C	7,6 Ohm/km	<300 V	≥0,28
11400T0000F355S1	1x4,00	56x0,30±0,01 mm	3,70 +0 mm -0,3 mm	XLPO – HFFR T4 150°C	4,7 Ohm/km	<300 V	≥0,32
11600T0000F415S1	1x6,00	84x0,30±0,01 mm	4,30 +0 mm -0,3 mm	XLPO – HFFR T4 150°C	3,14 Ohm/km	<300 V	≥0,32
11110T0000F550S1	1x10,00	80x0,40±0,01 mm	5,80±0,30 mm	XLPO – HFFR T4 150°C	1,82 Ohm/km	<300 V	≥0,48
11116T0000F720S1	1x16,00	126x0,40±0,01 mm	7,50±0,30 mm	XLPO – HFFR T4 150°C	1,16 Ohm/km	<300 V	≥0,52

ALL CABLES ARE TESTED ACCORDING TO THE REQUIREMENTS OF THE REFERENCE STANDARD

CAVI ZENIT SRL

Via Ganna 27, 21039 Bedero Valcuvia (VA), TEL. 0332/724512- FAX 0332/725145

E-mail: info@cavizenit.it - www.cavizenit.it - C.F. Iscr. Reg. Impr. Varese 02143560122

Trib. Di Varese 20379- Cap. Soc. € 105000,00 i.v. Partita IVA IT 02143560122